


SDI COMMERCIAL - MODEL C150



COMMERCIAL INSULATED SECTIONAL DOORS

- Manufactured, engineered, stocked and assembled in Canada
- Long-lasting door system that is suitable for dock doors
- Manufactured on a continuous polyurethane production line utilizing the latest in rigid foam technology
- A wide range of door operators and controls available to suit your application
- High strength to weight ratio to ensure a strong and long-lasting door system

SDI COMMERCIAL - MODEL C150

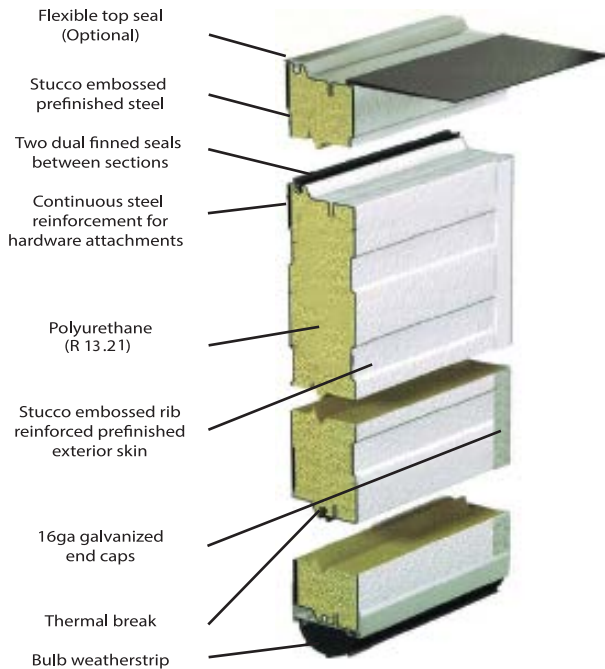

FEATURES

Insulated sections fabricated from prepainted, hot dip galvanized, steel sheet; with rigid polyurethane insulation core, CFC-1 1 free, face sheet stucco embossed and rib reinforced

Sections thermally broken, steel-polyurethane-steel sandwich formed by continuous process

Sections: formed with ship lap joint and 16mm (16ga) galvanized steel end-caps

Reinforcement: Continuous internal reinforcement for hardware mounting

Finish: Two coat, baked-on paint system, primer and polyester finish coat, white or brown

Hardware: 2" or 3" Adjustable continuous angle (ADCA) available

Design: Designed to meet industry standard windload requirements

Weatherstripping: Neoprene bulb weatherstrip with retainer. Two dual finned seals between sections (Optional track mount available)

Materials and Construction

C150 Sections	1 1/2" Thick
R-Value	R-13.21
Face Sheet Thickness	0.016" (0.41mm)
Maximum Opening Width	24'-2" (8941mm)
Maximum opening Height	22' (6706mm)
Warranty	10 years against delamination of the panels 1 year on materials and workmanship

Colour and Profiles

Panel Finishes - Ribbed profile



White

Brown

Glazing



B

CPL

E

D

Type B & CPL

Type E

Type D

Fullview



B: 24" x 6"
CPL: 24" x 8"

24" x 12"

34" x 16"

HEAVY-DUTY HARDWARE OPTIONS

DOUBLE-END HINGE



NYLON ROLLERS



EXHAUST PORT



HIGH CYCLE SPRINGS



Can be cut into any type of sectional door